


ZONE	REV	DESCRIPTION	DATE	APPROVED
	0	RELEASED ON ECN#0121	8/25/14	RM
	1	RELEASED ON ECN#0144	1/21/15	RCL
	2	PER ECO#0065, CHANGED DISCHARGE MANIFOLD.	4/14/16	DPH

MODEL	MOTOR	VOLTAGE	PRESSURE SWITCH SETTINGS		RELIEF VALVE	DIM "A"	NET WEIGHT	REBUILD * KIT #
			ON	OFF				
OL12516AC	1/6 HP	115/208-230V/1PH/60HZ	27 TO 30 PSIG	40 TO 44 PSIG	75 PSIG	14.25"		
OL32016AC-LP		115/208-230V/1PH/60HZ	13 PSIG	18 PSIG	75 PSIG	14.25"		
OL39012AC-50		220-240V/1PH/50HZ	27 TO 30 PSIG	40 TO 44 PSIG	75 PSIG	14.25"	30 lbs.	OLC-RK
OL39012AC-LP-50		220-240V/1PH/50HZ	13 PSIG	18 PSIG	75 PSIG	14.25"		
OL25033AC	1/3 HP	115/208-230V/1PH/60HZ	27 TO 30 PSIG	40 TO 44 PSIG	75 PSIG	14.25"		
OL55033AC-LP		115/208-230V/1PH/60HZ	13 PSIG	18 PSIG	75 PSIG	14.25"		
OL25033AC-HP		115/208-230V/1PH/60HZ	80 PSIG	100 PSIG	125 PSIG	14.25"		
OL75025AC-50		220-240V/1PH/50HZ	27 TO 30 PSIG	40 TO 44 PSIG	75 PSIG	14.25"	31 LBS.	
OL75025AC-LP-50		220-240V/1PH/50HZ	13 PSIG	18 PSIG	75 PSIG	14.25"		
OL75025AC-HP-50		220-240V/1PH/50HZ	80 PSIG	100 PSIG	125 PSIG	14.25"		

* REBUILD KIT (OLC-RK) CONSISTS OF REPLACEMENT CYLINDER,CUP AND INTAKE FILTER.

- NOTES:
1. COMPRESSOR APPEARANCE MAY VARY.
 2. DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
 3. ALL PIPING MUST BE INDEPENDENTLY SUPPORTED TO AVOID ANY UNDO STRESS ON COMPRESSOR HEAD.

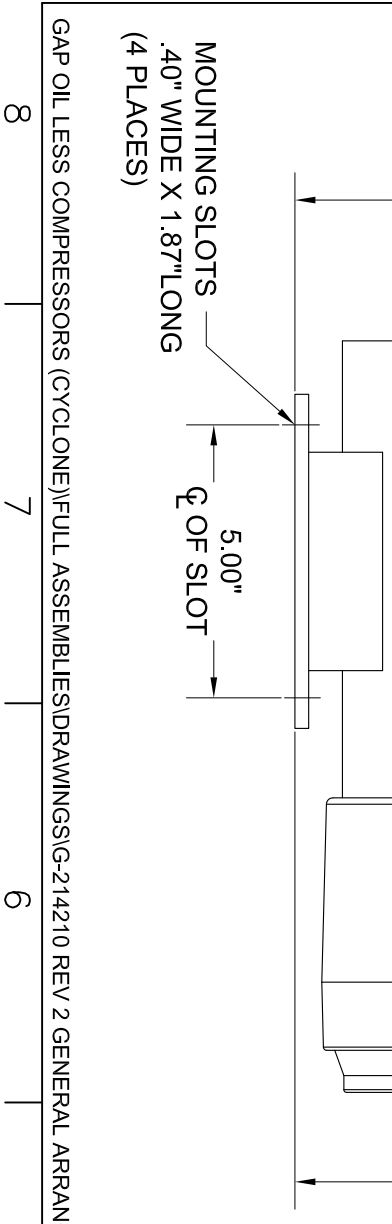

MOUNTING SLOTS
.40" WIDE X 1.87" LONG
(4 PLACES)

5.00" \varnothing OF SLOT

11.25"

4.50" \varnothing OF SLOT

10.25"

GAP OIL LESS COMPRESSORS (CYCLONE)/FULL ASSEMBLIES/DRAWINGS/G-214210 REV 2 GENERAL ARRANGEMENT 1 CYLINDER RISER MOUNT.DWG

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/2 xx ± 1.00° ±

		GENERAL AIR PRODUCTS	
APPROVALS	DATE	TITLE	DWG. NO.
DRAWN	08/25/14	GENERAL ARRANGEMENT	G-214210
CHECKED	08/25/14	1 CYLINDER OIL LESS FIRE PROTECTION COMPRESSOR, RISER MOUNT	
SCALE	SIZE		
SHEET 1/1	D		REV 2