


Fluid Pumping Stations

To promote ease of installation of the GENERAL "AFC" unit, **GENERAL Fluid Pumping Stations (FPS)** are provided in simplex or duplex pump configurations. The GENERAL "FPS" units are completely pre-wired and pre-plumbed on a common steel base plate for further ease of installation.

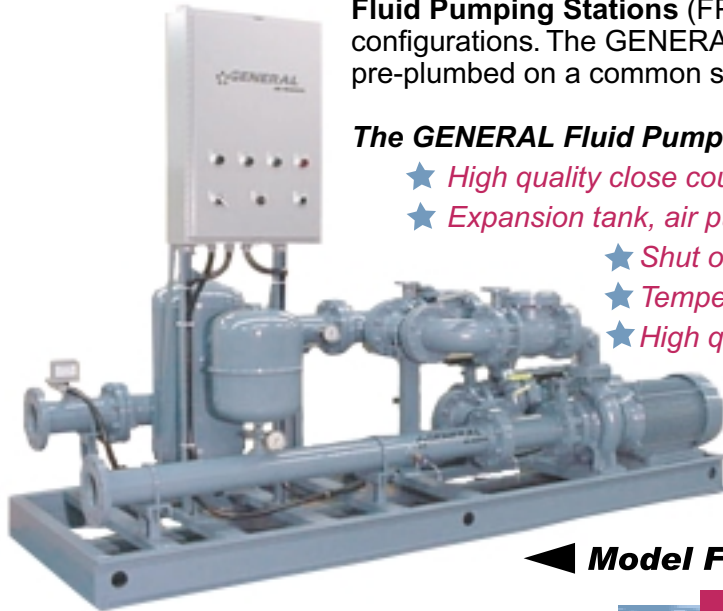

The GENERAL Fluid Pumping Stations also include these special features:

- ★ High quality close coupled centrifugal pump(s)
- ★ Expansion tank, air purger and air vent
- ★ Shut off safety valves
- ★ Temperature and pressure gauges
- ★ High quality flow switch
- ★ Reinforced steel base plate
- ★ Audible & visible alarm
- ★ Duplex unit has check valves & automatic throw over with alternation

◀ **Model FPSID44 Shown**

Simplex

Model Number	HP	Dimensions (in.)			Weight (lbs.)
		L	W	H*	
FPSXS44	1	56	10	31	380
FPSYS44	1.5	56	10	31	380
FPSZS44	2	56	10	31	380
FPSAS44	2	56	10	31	380
FPSBS44	3	56	10	31	400
FPSCS44	5	56	10	31	425
FPSDS44	7.5	60	13	35	475
FPSES44	10	60	13	35	575
FPSFS44	15	60	13	35	600
FPSHS44	20	60	13	35	640
FPSIS44	25	20	90	39	1050
FPSJS44	30	20	90	39	1150
FPSKS44	40	20	90	39	1300
FPSLS44	50	20	90	39	1400
FPSMS44	60	24	90	40	1450

Duplex

Model Number	HP	Dimensions (in.)			Weight (lbs.)
		L	W	H*	
FPSXD44	1	61	24	31	525
FPSYD44	1.5	61	24	31	525
FPSZD44	2	61	24	31	525
FPSAD44	2	61	24	31	525
FPSBD44	3	61	24	31	570
FPSCD44	5	61	24	31	620
FPSDD44	7.5	61	24	35	695
FPSED44	10	61	24	35	900
FPSFD44	15	72	30	35	930
FPSHD44	20	96	36	11	980
FPSID44	25	96	40	39	1600
FPSJD44	30	96	40	39	1800
FPSKD44	40	96	40	39	1950
FPSLD44	50	96	40	39	2200
FPSMD44	60	100	48	40	2300

* Height from floor to center of discharge piping. Consult Factory for pump selection and performance requirements.

NOTE: TRIPLEX and QUADPLEX units available - Consult Factory.