


SEE TRANSFORMER CONNECTIONS
FOR 575V, 460V OR 230V 60Hz OR 50Hz VOLTAGES

POWER INPUT FROM CUSTOMER

FUSE BLOCKS

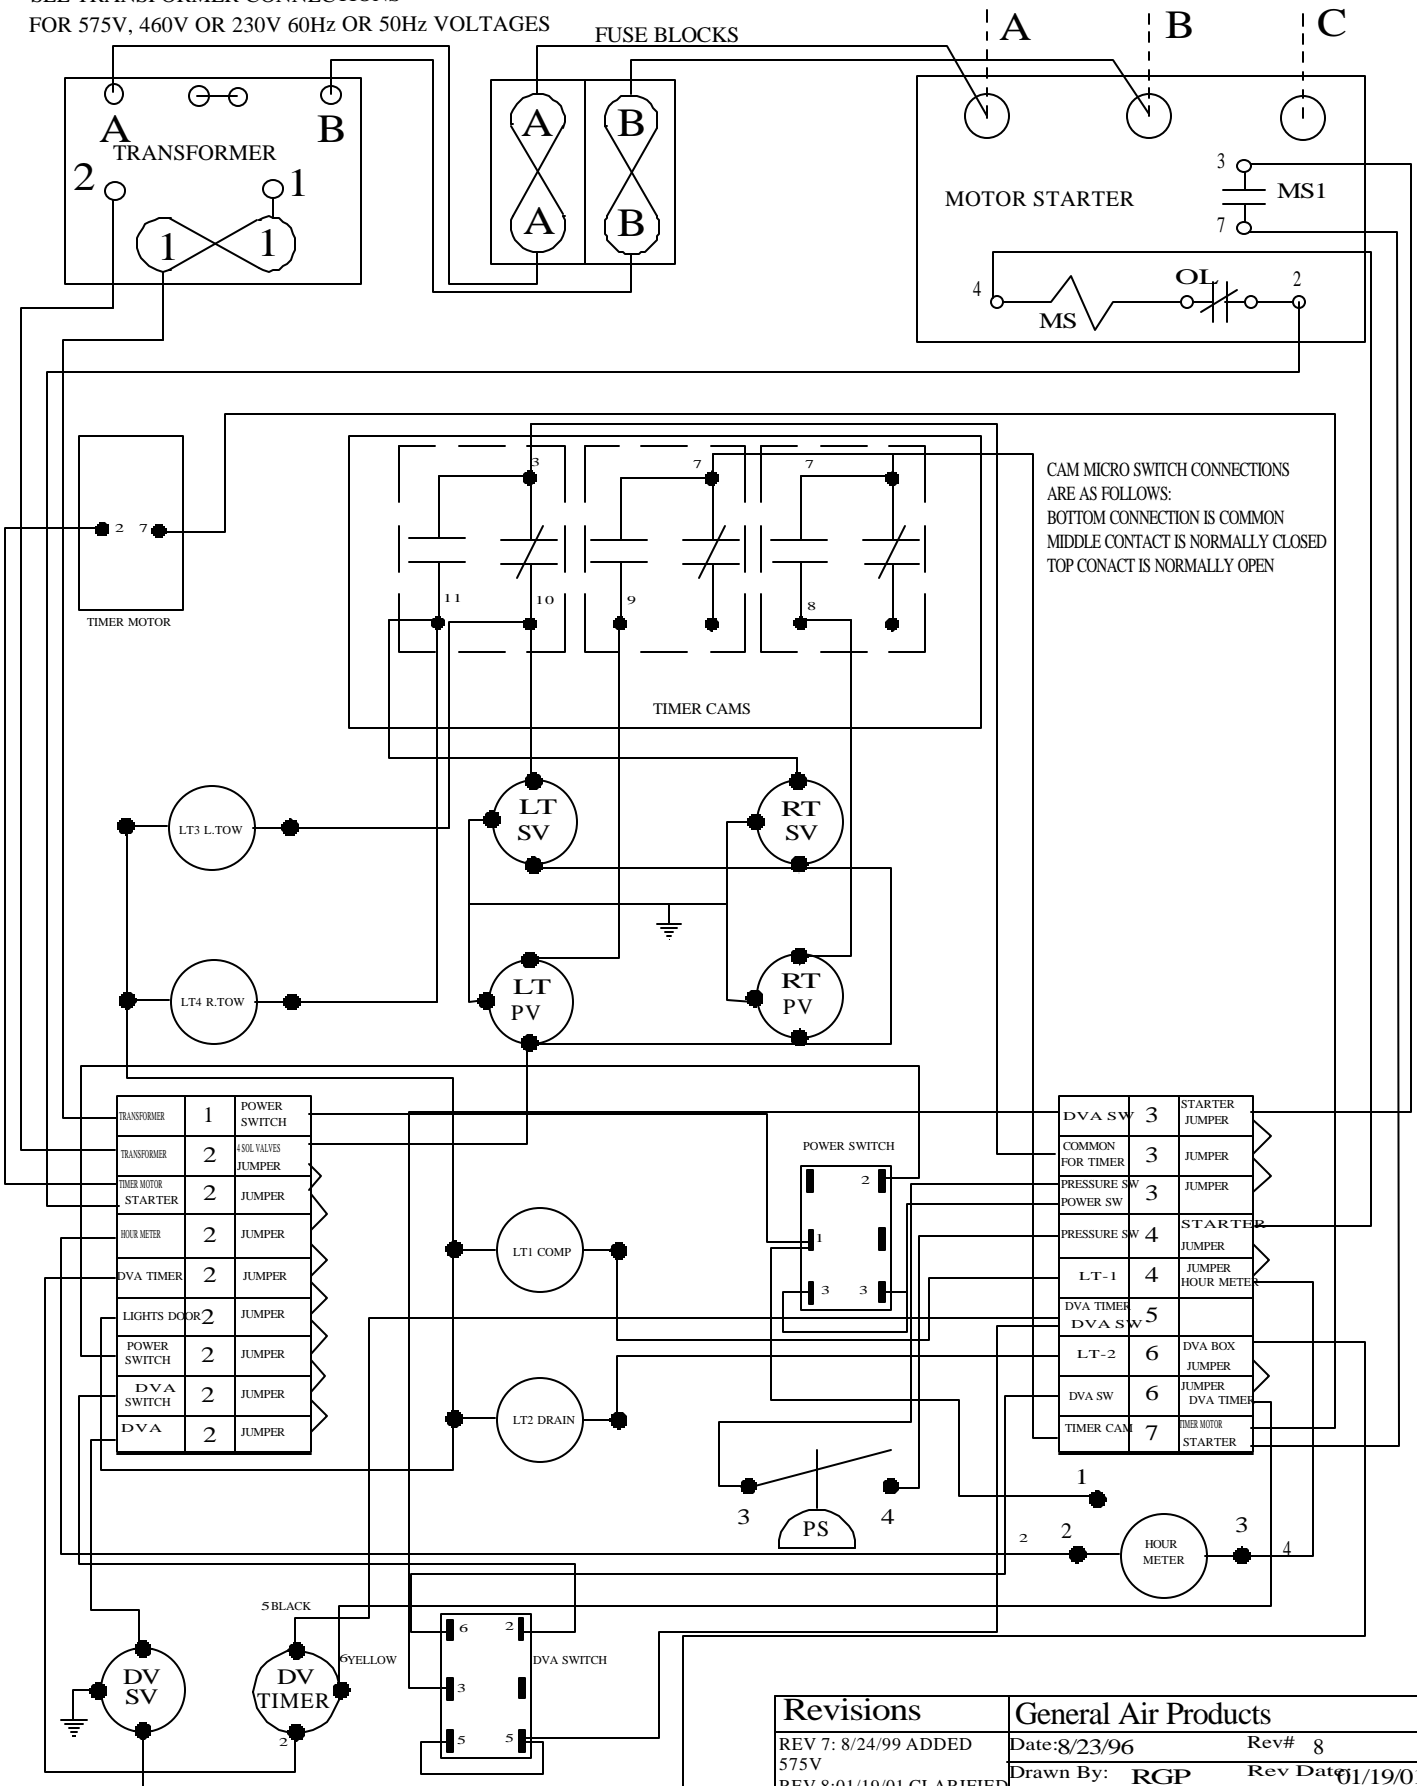

CAM MICRO SWITCH CONNECTIONS
ARE AS FOLLOWS:
BOTTOM CONNECTION IS COMMON
MIDDLE CONTACT IS NORMALLY CLOSED
TOP CONTACT IS NORMALLY OPEN

TRANSFORMER	1	POWER SWITCH
TRANSFORMER	2	SOLE VALVES JUMPER
TIMER MOTOR	2	JUMPER
STARTER	2	JUMPER
HOUR METER	2	JUMPER
DVA TIMER	2	JUMPER
LIGHTS DOOR	2	JUMPER
POWER SWITCH	2	JUMPER
DVA SWITCH	2	JUMPER
DVA	2	JUMPER

DVA SW	3	STARTER JUMPER
COMMON FOR TIMER	3	JUMPER
PRESSURE SW	3	JUMPER
POWER SW	3	JUMPER
PRESSURE SW	4	STARTER JUMPER
LT-1	4	JUMPER HOUR METER
DVA TIMER	5	JUMPER DVA TIMER
DVA SW	5	JUMPER DVA TIMER
LT-2	6	DVA BOX JUMPER
DVA SW	6	JUMPER DVA TIMER
TIMER CAM	7	TIMER MOTOR STARTER

Revisions		General Air Products	
REV 7: 8/24/99 ADDED 575V	Date: 8/23/96	Rev# 8	
REV 8: 01/19/01 CLARIFIED TIMER CONNECTIONS	Drawn By: RGP	Rev Date: 01/19/01	
	Drawing # E-9645	Scale: NTS	
Title: DRY AIR PAC ELECTRICAL - POINT TO POINT			