



The Leading Manufacturer of Air Compressors  
for the Fire Protection Industry

**OL Series**

**OILLESS TANK MOUNTED COMPRESSORS  
for Dry Pipe Sprinkler Systems**



- Fully Automatic
- Air Intake Filter(s)
- Oil Less Piston Compressor
- UL Listed Pressure Switch
- Bubble Tight Air Check Valve
- Permanently Lubricated Bearings
- A.S.M.E. Coded Tanks
- UL Listed Motor
- Thermal Overload Protection
- Fills System to 40 PSI in 30 Minutes (NFPA 13)

**Hazard Class:**  
Class I Groups C & D  
Class II Groups F & G

**Explosion Proof - 60 Cycle Units** - 50 Cycle Available, Consult Factory


System Capacity (gallons)**	Model Number	Average CFM*	Motor H.P.	Min. Wire Size ++	Dimensions			Weight (lbs.)	Tank Capacity (gallons)
					L	W	H		
110	OL11033ACT-EP	1.33	1/3	8	36	13.5	24	120	10
150	OL15050ACT-EP	1.80	1/2	8	36	13.5	24	124	10
220	OL22075ACT-EP	2.65	3/4	8	36	14	27	165	20
310	OL310100ACT-EP	3.75	1	6	36	14	27	165	20


NOTE: All units are 115/208-230/60/1 VAC

\* Average CFM is the average free air delivery from 0 to 40 PSIG.

++ Based on 100 foot run. Consult Factory for longer or shorter runs.

\*\* Based on 70 degree F system temp. For other conditions consult factory for pump up times.

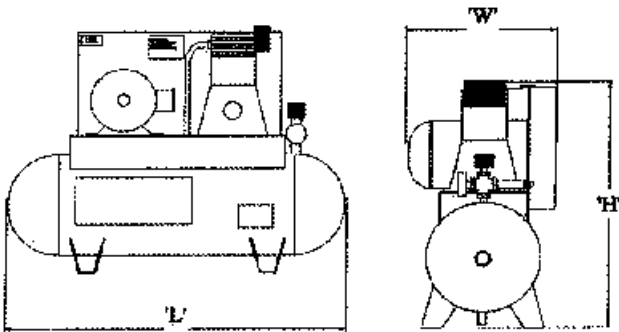



**Air Maintenance Device**  
**Part # AMD-1**

The AMD-1 is used when compressed air is supplied through an existing factory air supply or when using tank mounted units.

**Additional Units Available**  
If your application demands a larger or custom unit please contact us.  
**Custom Units Are Our Specialty**

**Call 1-800-345-8207**

Fax: 610-524-8965

E-Mail: [genairpro@generalairproducts.com](mailto:genairpro@generalairproducts.com)

Remember - You can find this sheet and more at

[www.GENERALAIRPRODUCTS.com](http://www.GENERALAIRPRODUCTS.com)