




**AIR PRODUCTS**

*The Leading Manufacturer of Air Compressors  
for the Fire Protection Industry*

**OL Series OILLESS RISER MOUNTED COMPRESSORS**  
**for Dry Pipe Sprinkler Systems**

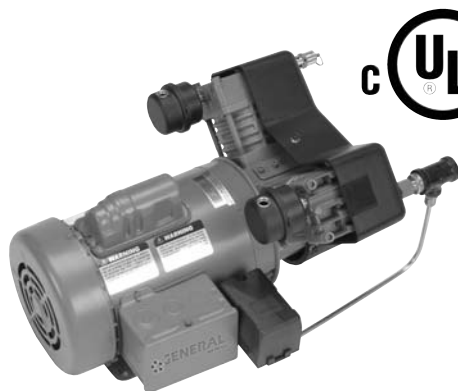



- Fully Automatic
- Direct Drive
- Air Intake Filter(s)
- Oil Less Piston Compressor
- UL Listed Pressure Switch
- Bubble Tight Air Check Valve
- Permanently Lubricated Bearings

- 1/2" Outlet Connections
- Thermal Overload Protection
- Riser Mounting Kit Included with "AC" Models
- Fills System to 40 PSI in 30 Minutes (NFPA 13)



**3 Phase 60 Cycle Units** - 50 Cycle Available, Consult Factory

System Capacity (gallons)**	Model Number	Average CFM*	Motor H.P.	Min. Wire Size ++	Dimensions			Weight (lbs.)
					L	W	H	
220	OL33550BC	2.67	1/2	12	32	13.5	23	114
320	OL42575BC	3.88	3/4	12	32	14	24	120
425	OL675100BC	5.15	1	12	32	14	24	124
700	OL800150BC	8.49	1 1/2	12	35	17	32	150
950	OL1200V200BC	11.48	2	12	35	17	32	167



\* Average CFM is the average free air delivery from 0 to 40 PSIG.

++ Based on 100 foot run. Consult Factory for longer or shorter runs.

\*\* Based on 70 degree F system temp. For other conditions consult factory for pump up times.

**Magnetic Line Starters - Thermal Overload Protection**  
**Three Phase**

	208/230V	460V	Size	Model
Maximum HP	1 1/2 HP	2 HP	00	MG00B*
	3 HP	5 HP	0	MGX0B*
	7 1/2 HP	10 HP	1	MG01B*

When Ordering a Magnetic Line Starter you must specify HP, Voltage and Phase that is supplied to the motor.

**Air Maintenance Device**  
**Part # AMD-1**

The AMD-1 is used when compressed air is supplied through an existing factory air supply or when using tank mounted units.

**Call 1-800-345-8207**

Fax: 610-524-8965

E-Mail: [genairpro@generalairproducts.com](mailto:genairpro@generalairproducts.com)

Remember - You can find this sheet and more at

[www.GENERALAIRPRODUCTS.com](http://www.GENERALAIRPRODUCTS.com)