




## OL Plus Series - Single Phase, 50Hz, Low Pressure, Riser Mounted Air Compressors for Dry Pipe Sprinkler Systems

**OL Plus Series**

**CE** This oil less riser mounted air compressor is CE marked.

- Oil Less Piston Compressor
  - UL Listed Pressure Switch
  - Bubble Tight Air Check Valve
  - Permanently Lubricated Bearings
  - Integrated Air Intake Filters
  - Fully Automatic, Direct Drive
  - Customized Motor Windings
  - Riser Mounting Bracket Kit
  - 30" Stainless Steel Flex Hose
  - Max Pressure: 4.1 BAR
- Specifically designed to fill the system to 1.36 BAR in 30 minutes**

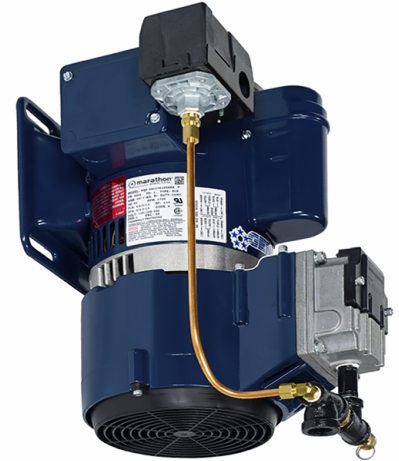

System Capacity*	Model Number	Average LPM**	Motor KW	Recommended Wire Size +	Dimensions (mm)			Weight (Kg)
					L	W	H	
1048 L	<b>OL39012AC-LP-50</b>	48	0.12	3 mm <sup>2</sup>	407	305	305	13.6
1762 L	<b>OL75025AC-LP-50</b>	80	0.25	3 mm <sup>2</sup>	407	305	305	14.1
2874 L	<b>OL114056AC-LP-50</b>	130	0.56	3 mm <sup>2</sup>	407	381	254	17.2
3743 L	<b>OL135075AC-LP-50</b>	170	0.75	5 mm <sup>2</sup>	432	381	254	21.8

### Accessory For Thermal Overload Protection:

MOTOR LINE STARTERS - SINGLE PHASE			
	220-240 Volt	Size	Model
MAX KW/HP	0.7 KW / 1 HP	00	<b>MG00A</b>
	1.4 KW / 2 HP	0	<b>MGX0A</b>
	2.2 KW / 3 HP	1	<b>MG01A</b>
	3.6 KW / 5 HP	1P	<b>MG15A</b>

When Ordering a Motor Starter you must specify KW/ HP, Voltage and Phase that is supplied to the motor.

### Notes:

- \* System Capacity based on 21°C system temperature.
- \*\* Average LPM is the average free air delivery from 0 to 2.7 BARG (0 to 40 PSIG)
- + Recommended Wire Sizes based on 30 meter run. consult factory for longer or shorter runs.

**VOLTAGE:** All Units 220-240 Volt

