

# RFP★System


## Open Complete with Tank Residential Fire Protection Pump System



General Air Products' Residential Fire Protection Pump System (RFP System) is the benchmark of quality for meeting 2010 NFPA 13D application requirements.

Our complete RFP Systems deliver a wide variety of features and benefits that work together to meet the need of your application simply, efficiently and reliably.

- True Stainless Steel Pump
- Non-Ferrous Piping System
- 29" Wide Narrow Water Tank
- Cut & Sealed Bulkhead Fittings
- NEMA Rated Electrical Control Box
- Power "On" Indicator
- Audible Alarm System
- Alarm Signal Contact
- Motor Starter "Reset"
- H-O-A Switch (allows pump test)
- DPDT Flow Switch
- Water Delivery Pressure Gauge
- Motor Overload Protection
- Return Connection
- Fill Valve
- **See Brochure for Complete Feature List**

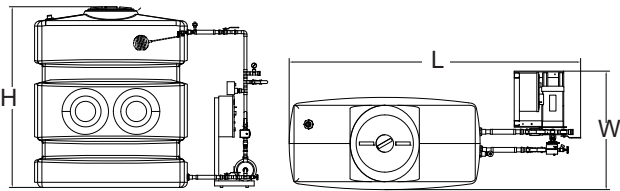

L x W x H

OPS with 300 gal. tank: 93" x 36" x 57"

OPS with 400 gal. tank: 93" x 36" x 71"

**NOTE: Use page 2 of this document to select the correct model number based on your systems' pressure and flow requirements.**

**\*Insert 3 for 300 gallon tank, 4 for 400 gallon tank.**

**Note: Standard RFP System Voltage is 230/1/60. For other voltage requirements, consult factory.**

All information subject to change without notice.

Model Number	AMP Draw	Unit + Tank Weight (lbs.)	
		300 gal. Tank	400 gal. Tank
OPS11-C-T*	9.8	308	340
OPS13-C-T*	9.8	299	331
OPS14-C-T*	9.8	317	349
OPS15-C-T*	9.8	317	349
OPS16-C-T*	11.0	299	331
OPS17-C-T*	12.8	303	335
OPS18-C-T*	13.8	333	365
OPS19-C-T*	13.8	332	364
OPS20-C-T*	13.8	357	389
OPS21-C-T*	19.5	367	399
OPS22-C-T*	23.7	386	418
OPS23-C-T*	23.7	391	423
OPS24-C-T*	29.0	457	489
OPS25-C-T*	29.0	457	489